

Copyright: www.dancar.dk

DK Det skal understreges, at montering, der udføres af en ikke-kvalificeret montør, medfører bortfald af enhver ret til erstatning særligt i forbindelse med erstatningskrav, der måtte opstå i kraft af loven om produktansvar.

- Sættes indhold og monteringsvejledninger kan ændres uden varsel, og vejledningerne skal derfor læses og forstås, før monteringen påbegyndes.


DE - Beachten Sie bitte, dass bei Schäden in Folge unsachgemäßen Einbaus sämtliche Garantieansprüche erlöschen, insbesondere solche, die das Produkthaftungsgesetz betreffen.

Das Recht zu Änderungen an Inhalt von Montagesatz und Einbauanleitungen ohne Vorankündigung bleibt vorbehalten. Lesen Sie vor dem Einbau diese Anleitung sorgfältig und gewissenhaft durch.

GB - We would expressly point out that assembly not carried out properly by a competent installer will result in cancellation of any right to damage compensation, in particular those arising by virtue of the product liability act.

Contents of these kits and their fitting manuals are subject to alteration without notice, please ensure that these instructions are read and fully understood before commencing installation.

Contents

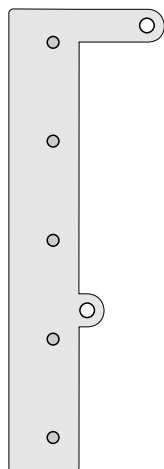

Distance stag 30 mm



Distance stag 25 mm




2 pcs. tensi nut 6 mm




1 pcs. Tensi bolt 6x10 mm



2 pcs. disher 20x6x1 mm

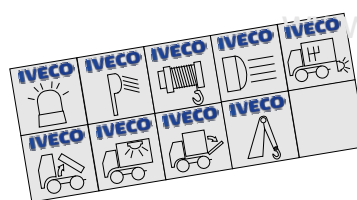


Stickers for relays

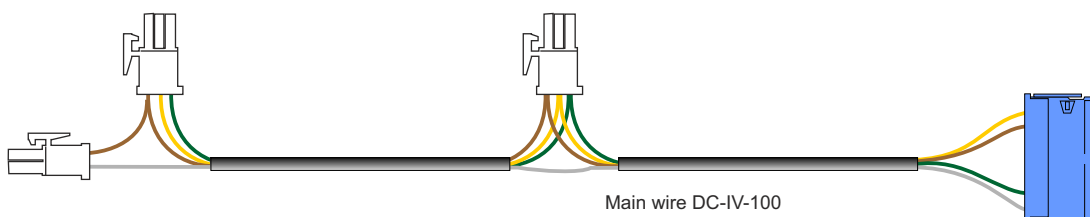

Relay mounting plate


Main wire DC-IV-100

①

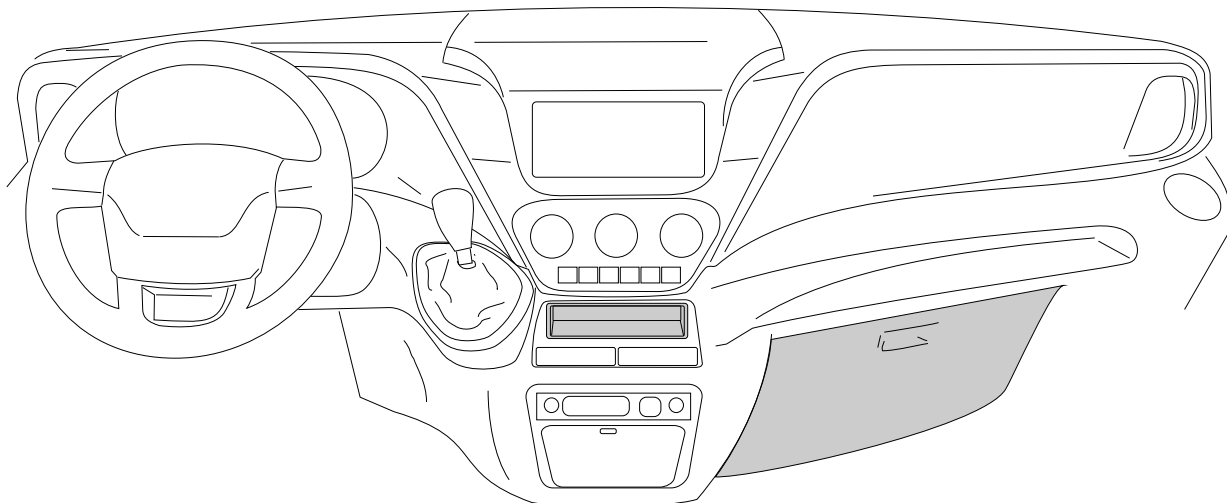

Glow compartment must be removed to get access to the blue «builder connector»
Coinbox to be removed to get access routing the main wire across the panel


②

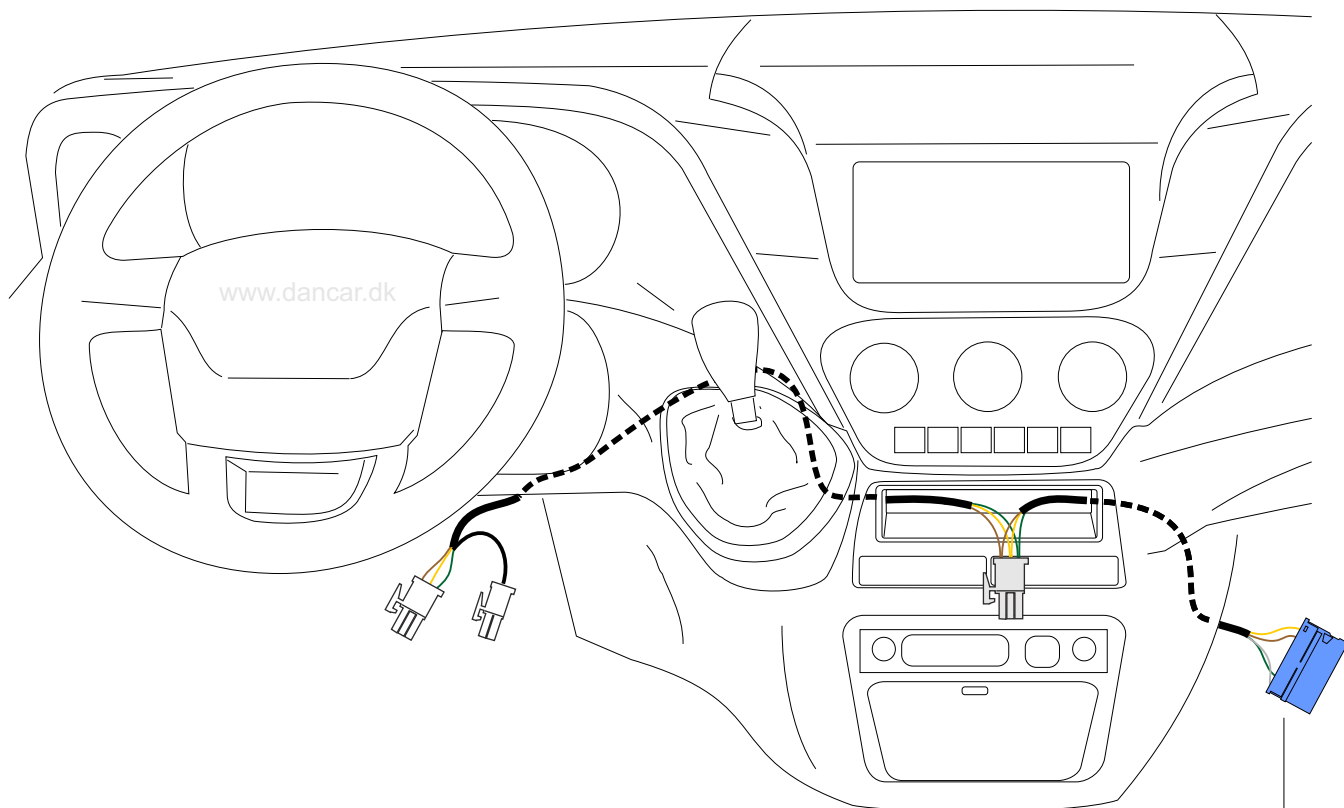



Main wire

Place the main wire as shown. It is advised to use a plastic-string to help access specially between the coinbox and the steering wheel cover

③

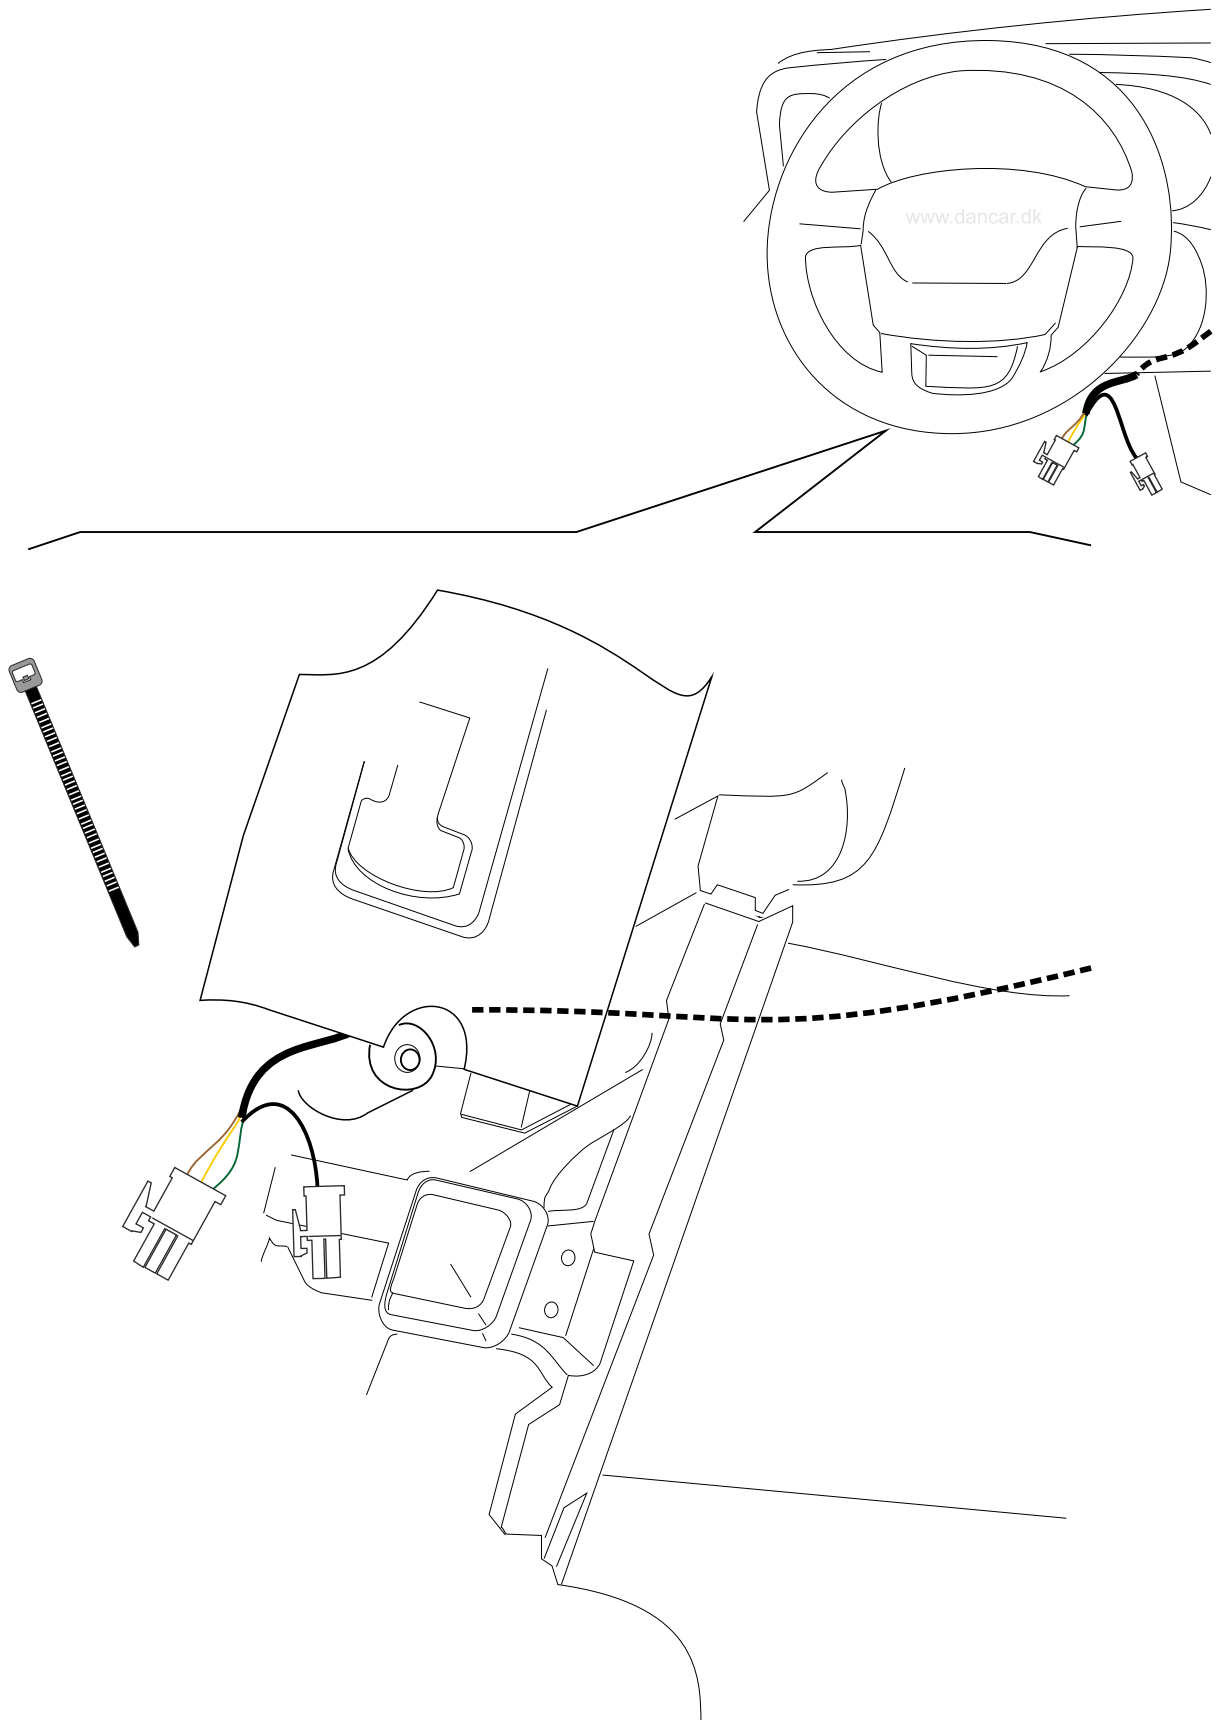

Fasten the main wire onto the lower point of the steering wheel cover (lower part)

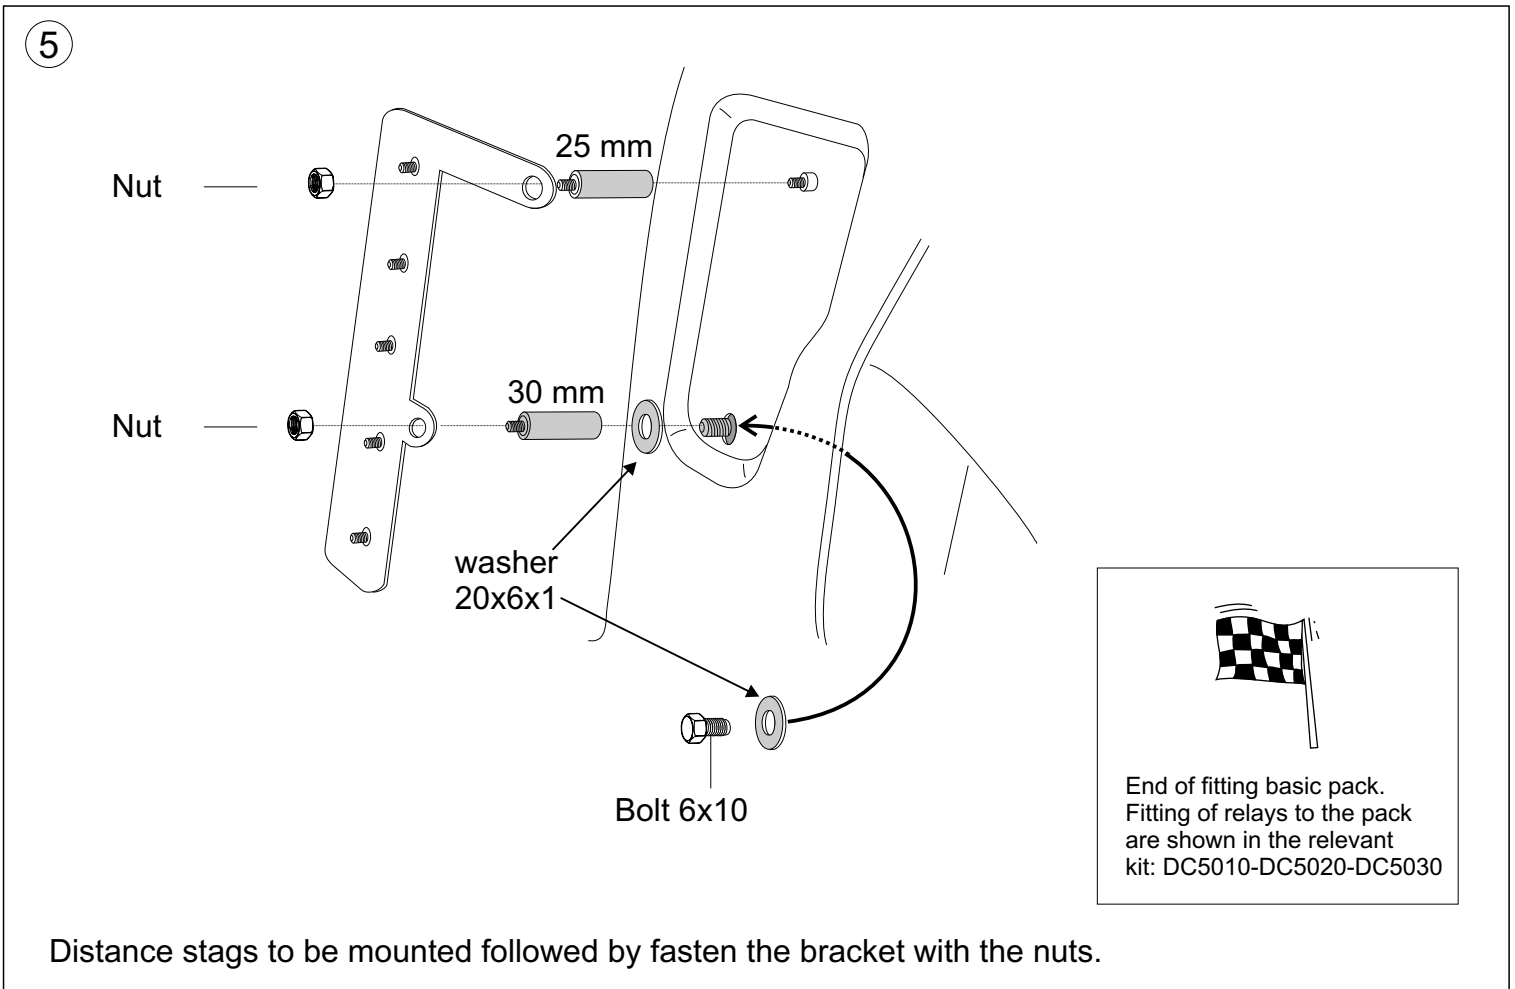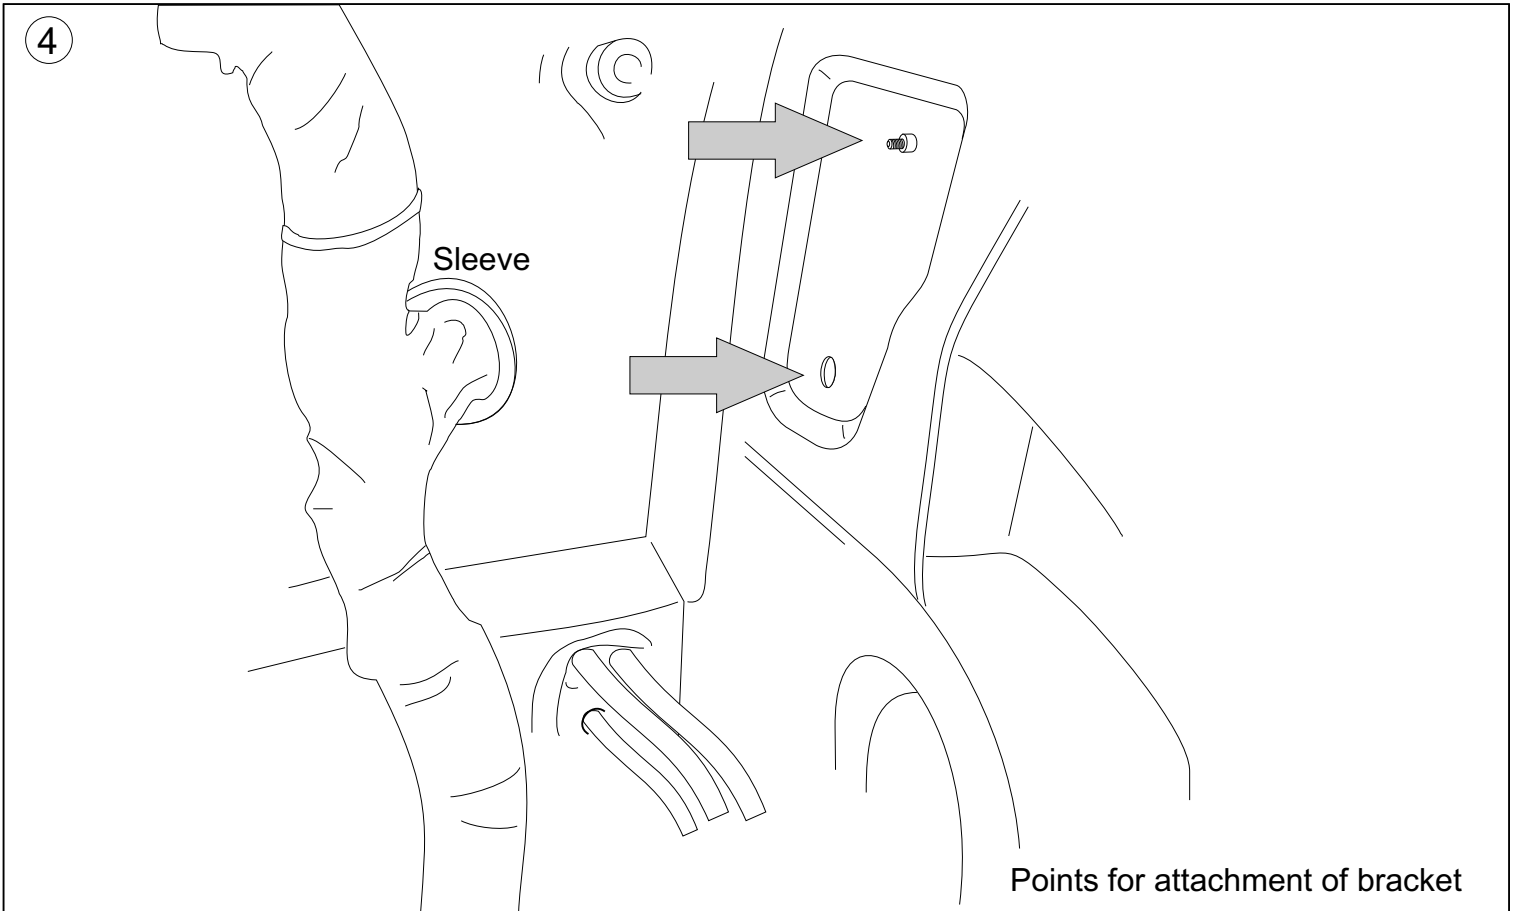

Distance stags to be mounted followed by fasten the bracket with the nuts.